


IMPORTANT NOTE: The textured surface **MUST** face up and the smooth surface must face the **INSIDE** of the gutter for SlimGuard to perform properly.


STRAIGHT RUN INSTALLATION

1. Install support strut by putting strut into bottom, rear corner of gutter and bend the strut to tuck under the lip of the gutter.


Install one support strut near the center of each three foot section.

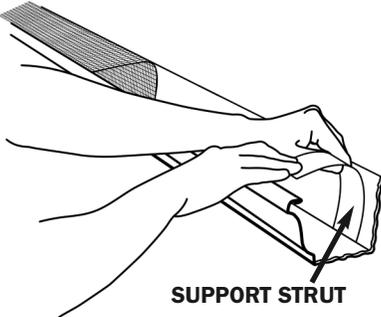

2. Place a section of SlimGuard into the gutter and slide down to the bottom, rear of gutter corner behind the support strut.

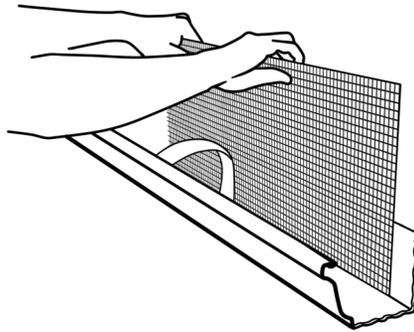


3. Fold the SlimGuard over the support strut and tuck under the front lip of the gutter. The textured surface should be on top.

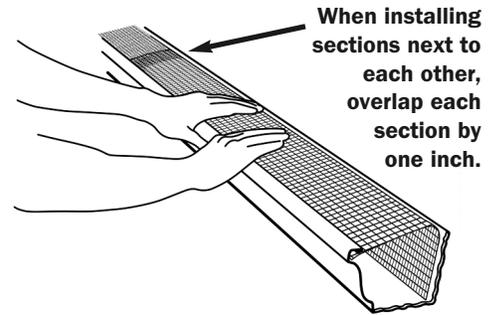


HIDDEN HANGERS OR SPIKE AND FERRULE INSTALLATION

Cut a notch for hidden hangers or spike and ferrule gutter installation. Slim Guard goes **OVER** the gutter hanging system.




Spike and Ferrule Installation.

Cut a small "V" notch in the leading edge to install SlimGuard around ferrule and under the lip of the gutter.




END CAP INSTALLATION

1. When approaching an end cap, cut the SlimGuard to form a tab with angled sides.

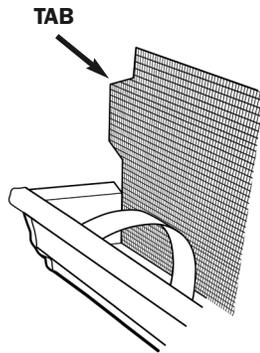

2. Fold the tab down and tuck into the end cap of the gutter.

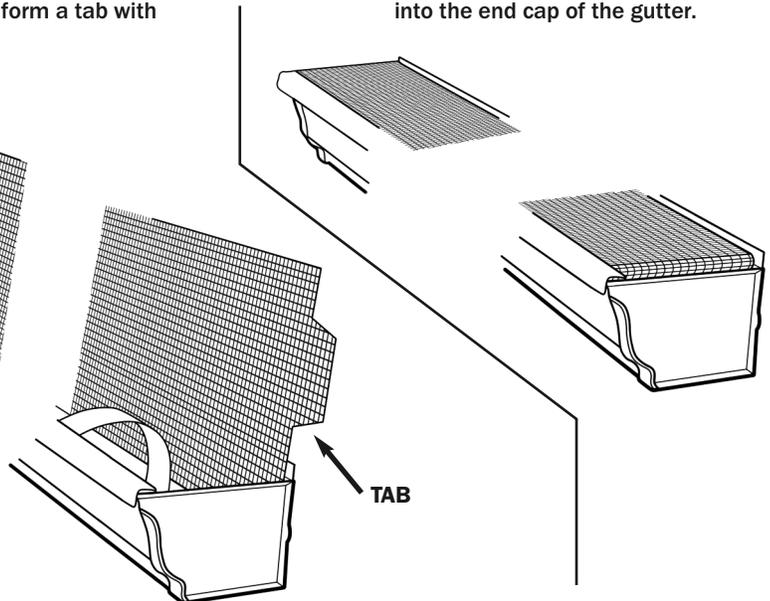


IMPORTANT NOTE: Make sure tab is long enough to go down into the gutter without popping out.


IMPORTANT NOTE: The textured surface **MUST** face up and the smooth surface must face the **INSIDE** of the gutter for SlimGuard to perform properly.

INSIDE CORNER INSTALLATION


1. Install two support struts in the inside corner as close to the corner as possible.

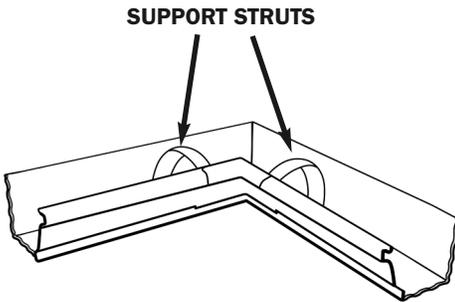


2. Install first section of SlimGuard so that it reaches the back wall of the adjacent gutter.

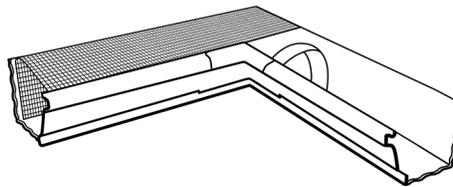


3. Cut out a section of SlimGuard to create a tab that will install over the section that was just installed. The tab should go down the back wall and reach the bottom of the gutter.

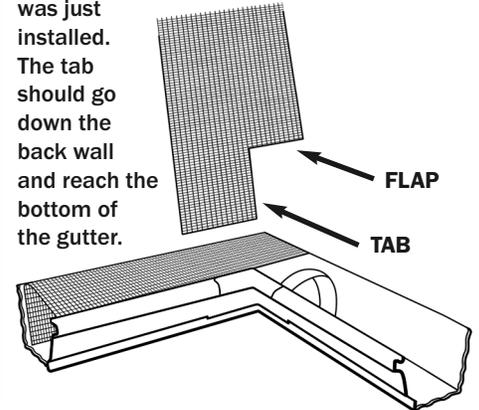

4. Fold the SlimGuard over the installed section while inserting the flap along the back wall of the gutter. Once the bottom edge of the flap reaches the bottom of the gutter, tuck the leading edge of SlimGuard under the front lip of the gutter.

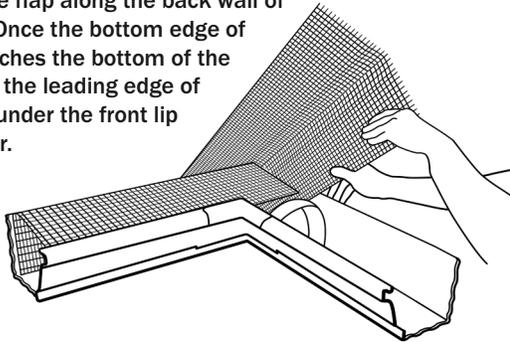


5. The completed inside corner installation should resemble the illustration below. There will be two layers of SlimGuard over the two support struts installed into the corner in step 1.

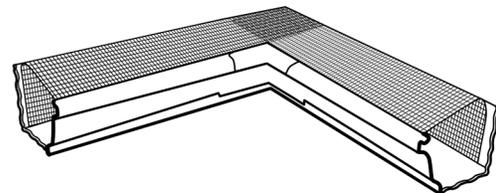


OUTSIDE CORNER INSTALLATION

1a. Cut a notch for hidden hangers or spike and ferrule gutter installation. SlimGuard goes **OVER** the gutter hanging system. Cut out a section of SlimGuard to allow water to flow around the outside corner. This cut creates a tab that will cover the gutter.

1b. Install the cut section of SlimGuard down the back of the gutter all the way to the bottom.

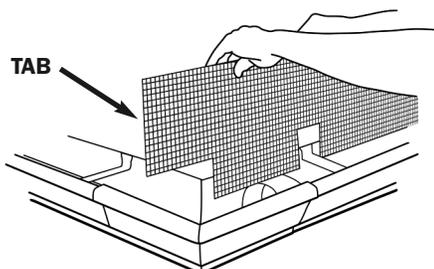


2. Fold SlimGuard to allow tucking the leading edge under the lip of the gutter. The tab that was created after the cut will tuck under the lip of both sections of the outside corner.

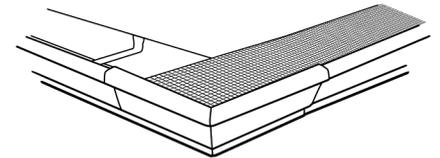

3a. For the opposing section of the outside corner, cut a similar notch and tab to those in step 1a so that this section of SlimGuard overlaps the outside corner section already installed.

3b. Slide this section of SlimGuard down the back of the gutter all the way to the bottom.

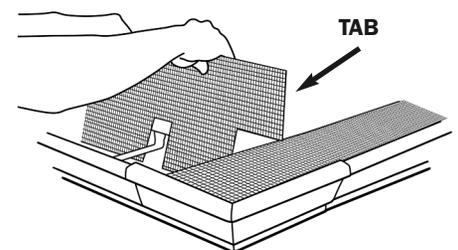

4. Fold SlimGuard and tuck the leading edge under the lip of the gutter. The tab that was created after the cut will overlap the section already installed and will tuck under the lip of both sections of the outside corner.

